

Apivio Liberty L2 - Quick User Guide



- ❶ Volume : Adjust the sound volume.
- ❷ Menu : Access the phone menu.
- ❸ Search : Search your contact list by name.
- ❹ Wireless Line : Search Wi-Fi networks.
- ❺ Call Logs : Access the call logs.
- ❻ Message : SMS (Texting is not supported at this time).
- ❼ Phone Book : Access the phone book.
- ❽ OK : Select the item.
- ❾ Speaker Phone : During a calling, press the [📢] button to call via the external speakers.
- ❿ Keypad : To input text, press the [📎] button then Text input keypad will appear.
- ⓫ Call : Receive or end a call.
- ⓬ End : End a call. Power on/off.
- ⓭ Number/Text : Input numbers or text.
- ⓮ * /Vibrate Mode : Press and hold the [*] button for vibrate mode.
- ⓯ # /Lock : Press and hold the [#] button to lock/unlock the keypad.
- ⓰ Pick Up : Pick up a call from another phone on your account.
- ⓱ Mute : Mute your current call.
- ⓲ Trans : Transfer current call to another phone number.



Status Icon

Indicates phone status.

For additional details, please refer to the icon legend on the next page.

Time, Date

Indicates the time and date.

Menu

Press to access phone menu.

Search


Press to search phone book.

	Indicates Wi-Fi signal strength. Strong signal Weak signal
	Indicates the phone call function is unavailable. (No account information)
	Indicates the phone call function is unavailable. (Authentication failure)
	Indicates the phone call function is available.
	Indicates the alarm has been set.
	Indicates you have unread messages.
	Indicates the answering machine function has been set.
	Indicates that the phone is in locked mode.
	Indicates battery status. Fully Charged Good Poor Charge
	Indicates the battery is charging, and the charging status.
	Indicates the CLive server status.

Press the button to power on Check the Wi-Fi status of AP.

Case of the connect automatically case.

If the phone doesn't have a Profile, the phone will start scanning AP automatically.

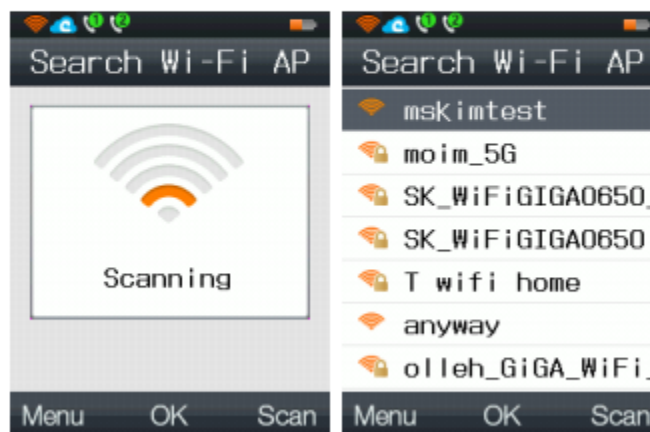


	<p>Step 1. Select one Service Provider.</p>
	<p>Step 2. Key in user's Email address. (you can skip this menu)</p>
	<p>Step 3. Key in SIP account information.</p> <p>After keyin Account number, Password, Server Info, press <input type="button" value="Search"/> key to verify the account information.</p> <p>Once the account information is verified, the phone will be connected to CLive.</p>

1. Make a call

<p>Input the call number</p>	<p>Press the phone number</p>
<p>Using Phone history</p>	<p>Select the number on history.</p>
<p>Using phone book</p>	<p>Search and select the desired number.</p>
<p>Short dial</p>	<p>In standby mode, press and hold the last digit of Short dial. (Short dial can be registered 00-99)</p>

2. During a call

Once a call is connected, the phone will show the network quality via icon.

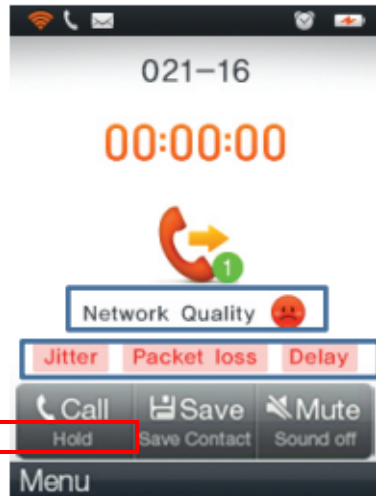

Network Quality

	Excellent Call Quality
	Good Call Quality
	Poor Call Quality

To put a call on hold, please click the "Call" button again.

If the network quality is poor, the phone will show the poor factors among Jitter, Packet Loss, Delay.

3. Answer & Hang Up

Setting is [Menu] > 2.Call Manage > 2. Answer & Hang Up option

1. Answer option

If Answer type is set [Press button]

Press any button to receive incoming calls, except the button.

If Answer type is set to [Pickup handy]

Call is connected when you lift the phone from the charging cradle.

2. To hang up the call

- Place handset on cradle : Put the handset on the cradle, then the call will be ended automatically.
- Press the end button : Press button to end the call.

4. Call History

Pushing the call button can check the history of incoming calls, outgoing calls, missed calls.

Call history contains up to 500 logs in total.

- button : Call one of the logged phone numbers.
- button : See phone number details.
- button : Send a message (if enabled) or save/delete number.

◆ You can confirm as [Menu] > 2. Call Manage > 1.Logs.

5. Call Transfer

You can transfer a call to another number or to another phone in the same group

